

CLASSIC RANGE

IP67



The SAVOX® C-C440 Com-Control Unit is a Push to Talk Unit designed for use in demanding environments. It offers easy and reliable communication for professionals operating in harsh conditions. The SAVOX® C-C440 Com-Control is dust proof and submersible to 1 m.

With a headset, it provides a hands free way to stay connected with your team and ensure the efficiency and safety of your operations. The emergency button option provides an additional safety feature, allowing the user to give an immediate distress signal.

- ✓ Easy to operate even while wearing personal protective equipment, the radio can be operated when secured underneath clothing
- ✓ Reliable and durable
- ✓ Dust proof and submersible (IP67)
- ✓ Emergency button option
- ✓ Large, easy to operate PTT button
- ✓ Excellent tactile feeling

FEATURES

- Adapts any SAVOX® Classic headset to your two-way radio
- Large tactile "glove friendly" PTT button
- Large 360° rotating clip
- Sealed Ruggedized Enclosure (IP67)



OPTIONS

- PTT button available in black (red as standard)
- Small rotating clip available (large as standard)
- Emergency button (radio specific)
- Also available as an ATEX version (radio specific)

APPLICATIONS


Ideal for professionals who need to communicate hands free and/or with their radio secured underneath protective clothing.

- Firefighting & Emergency Services
- Industry
- CBRNe & HazMat
- Mass Decontamination
- Oil, Gas and Petrochemical
- Refineries and Process Plant
- Water treatment facilities
- Power Generation and Mining



CLASSIC RANGE

IP67

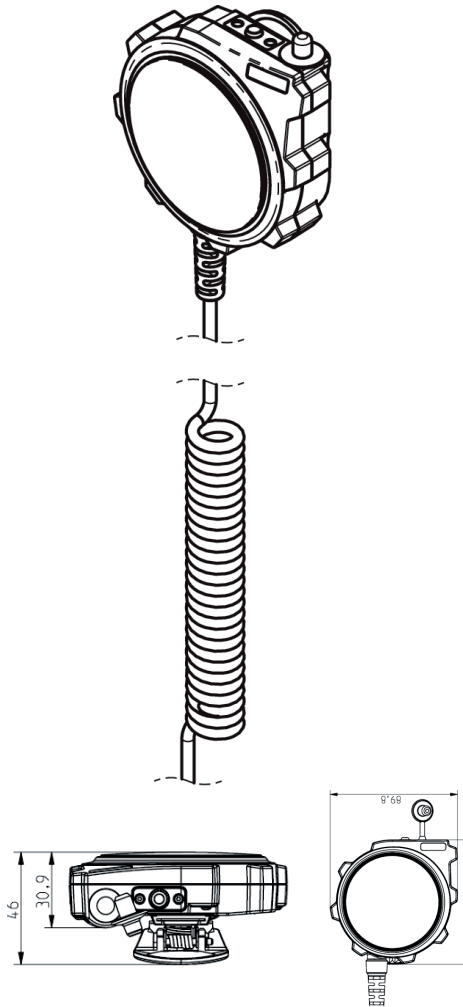

TECHNICAL DATA

Weight: 140g (excluding the connector cable)
 Size: 66 mm (PTT diameter)
 Material: Polyamide
 Fixing: Rotating clothing clip
 Connectors: 4-pole quick-release jack for the headset, radio-specific connector
 Operating temperature: -40 to +85 °C (continuous)
 Storage temperature: -25 to +85 °C
 Supply voltage: 3.0...10.0 VDC
 Humidity: 100% @ +40 °C/21 days
 ESD, EMI immunity: conforms to EN 301 489-1 and EN 301 489-18
 Ingress protection: IP67
 Operational PTT lifetime: 500 000 cycles
 Emergency button option: 40 000 cycles



ENVIRONMENTAL TESTS

Low temperature	-40°C	16h	EC 60068-2-1-2007
High temperature	+85°C	16h	IEC 60068-2-2-2007
Vibration	200Hz Sine, 4m/s ²	5 cycles/axis	IEC 60068-2-6-2007
Temperature cycling	-40°C -30°C, 1°C/min	5 cycles	IEC 60068-2-14-2009
Mechanical shock	Half-sine, 50m/s ² , 11ms	3 shocks/axis	IEC 60068-2-27-2008
Drop test	1m	6 drops	IEC 60068-2-31-2008
Humidity	100%, 40°C	21 days	EN 300 019-2-7

COMPATIBILITY

The C-C440 uses the SAVOX modular concept which provides a versatile and flexible communication solution.

The SAVOX® C-C440 is compatible with all SAVOX® Classic headsets with 4-pole quick-release connector.



CONTACT

Europe / RoW Tel. +44 (0) 1629 820 820
 Email: savox@savox.com
 North America Tel. 1-800-546-3405 (toll free)
 Email: savoxna@savox.com

