


SAVOX® N-C noise-com unit



User data

- boom microphone
- for high-noise environments
- fits all regular ear protectors thanks to an ingenious attachment system
- quick-release connector
- adapts to all SAVOX PTT units

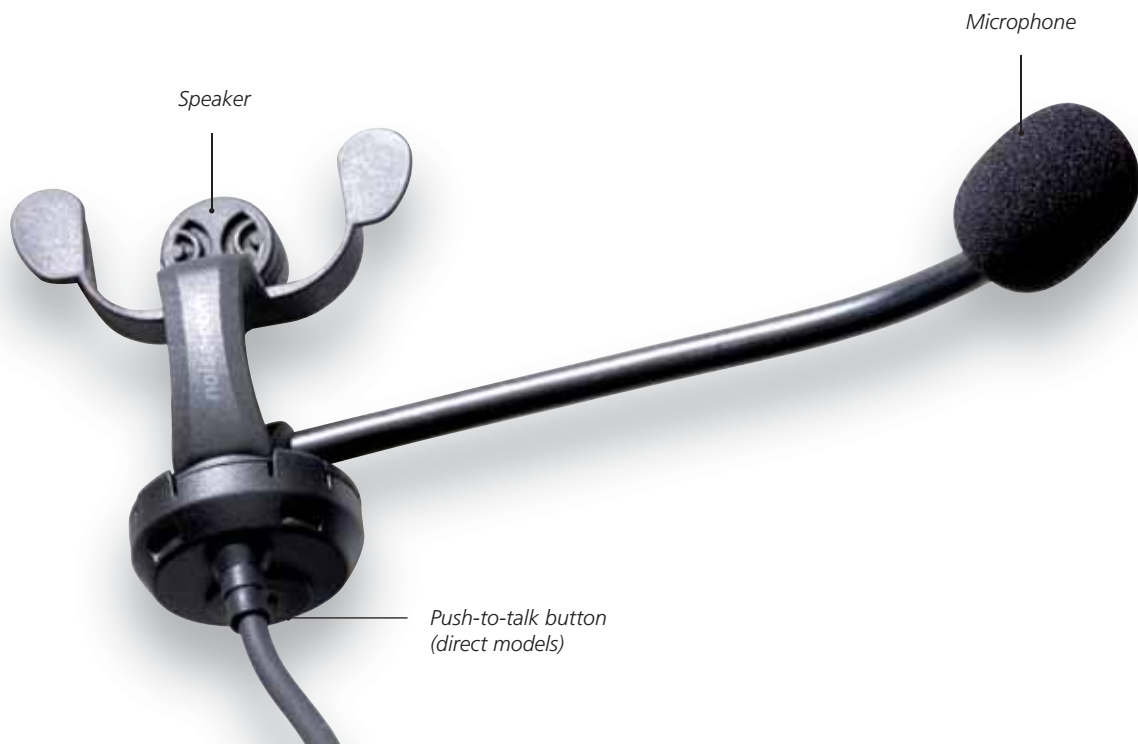

TECHNICAL DATA

Weight	81 g
Size	70 x 175 mm
Directivity	noise-cancelling
Mic impedance	2500 ohm @ 1 kHz
Speaker impedance	360 ohm @ 1kHz (±15%)
Cable	coiled, Ø 4 mm, 270 mm, PUR, flame-retardant
Connector	SAVOX® NC Direct according to radio/phone
Operation temperature	-25 to +63 °C (continuous)
Humidity	95% RH, +63 °C for 500 hours

OPTIONS

- direct models with VOX function (radio model related feature)