

ASW366W

Sirena con flash para montar en pared. Base de perfil bajo. Blanca con lente roja.

General

The ASW366W is a WHITE, general purpose, wall mount, electronic sounder and beacon for fire alarm applications. It features a special base containing all wiring connections allowing for easy placement or removal of the device. With an EN54-23 approved coverage pattern of W-2.4-7.5 for the beacon, each ASW366W may be mounted up to 2.4m high and cover a square room of 7.5 x 7.5m with a single device.

Easy and Fast Installation

The ASx360 series alarm sounder/beacons allow faster installation and maintenance thanks to an innovative mounting base. Dispensing with the need for locking screws these devices use TimeSaver™ bases from the 630 series detector lines. Heads are simply locked onto the base with a “twist and click” action, allowing fitting or removal at any time because the base is the only component that needs to be wired. As the cabling requirement is reduced, commissioning time and costs are naturally reduced as well.

Efficient and versatile

The ASx360 series sounders provide high sound output at a low current, thus reducing power requirements and system cost. They are supplied with a volume control as standard, allowing final audio adjustments to be made during installation. With a choice of 32 different tones (see tones table in manual), which are switch selectable, the required tone can be selected during installation.

The ASx360 series beacons utilise a specially designed lens giving a uniformed light output over the specified coverage area.

The mechanism for locking the device to the base may be activated if required. Once activated, a special tool is required to remove the sounder from the base.



Details

- High sound output with Pulse Alert™ technology
- 32 Tones user selectable
- Automatic synchronisation
- Volume control and adjustable flash rate
- Anti-Tamper locking mechanism
- Shallow mouting base with wiring to the base
- Seperate sounder and beacon and control
- EN54:3 and EN54:23 approved, CPR Certified

ASW366W

Sirena con flash para montar en pared. Base de perfil bajo. Blanca con lente roja.

Technical specifications

General

Monitorización de línea Polarised input

Eléctrico

Voltaje de funcionamiento 17 to 60 VDC

Consumo de corriente Sounder: 5.1mA
Beacon: 20mA @ 0.5 Hz

Sirena

Nivel de salida 85 to 97dB(A) @ 1 m (tone dependant)

Tonos seleccionables 32

Sincronización Phased start

No. de etapas Automatic

Físico

Dimensiones físicas 100 x 100 mm (Ø x D)
Shallow base

Peso neto 215 g

Color Rojo, Blanco

Material Policarbonato de alto impacto

Medioambiental

Temperatura de funcionamiento -25 to +70°C

Humedad relativa 5 to 95% noncondensing

Entorno Interior

Clasificación IP IP21

Estándares y regulaciones

Certificación EN54-23, EN54-3

Operation

Continuous

EN54-23 rating


Light coverage W-2.4-7.5

Mounting position Wall

Mounting height up to 2.4 m

Floor coverage up to 7.5 x 7.5 m

EN54-23 Coverage: W-2.4-7.5

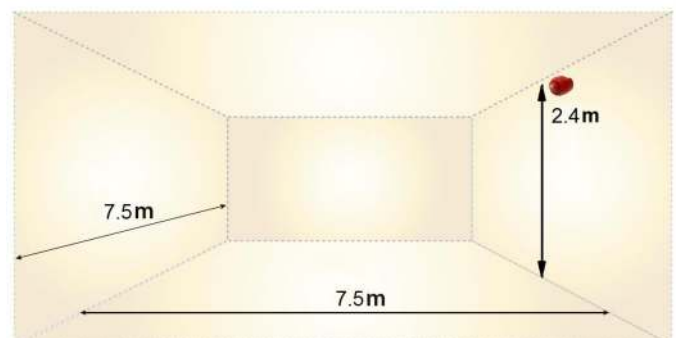

Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de es.firesecurityproducts.com o póngase en contacto con su comercial.

Last updated on 4 October 2021 - 17:25